



## Product Information

**Customer : Gen**

**ISSUED DATE :May. 07, 2009**

***SAMSUNG TFT-LCD***

**MODEL : LTA460HF07**

*The Information Described in this Specification is Preliminary and can be changed without prior notice*

NOTE :

LCD Business

Samsung Electronics Co . , LTD.

MODEL

LTA460HF07

Doc. No

06-000-G-090428

Page

1 / 28

## Contents

General Description .....	(3)
General Information .....	(3)
1. Absolute Maximum Ratings .....	(4)
1.1 Back Light Unit Absolute Maximum Ratings	
1.2 LED Unit Absolute Maximum Ratings	
2. Optical Characteristics .....	(6)
3. Electrical Characteristics .....	(9)
3.1 TFT LCD Module	
3.2 Back Light Unit	
3.3 LED LIPS Condition & Specification	
4. Block Diagram .....	(12)
5. Input Terminal Pin Assignment .....	(13)
5.1 Input Signal & Power	
5.2 LED LIPS AC Input Pin Configuration	
5.3 LED LIPS Input & Output Pin Configuration	
5.4 LED LIPS Power ON/OFF Sequence	
5.5 LVDS Interface	
5.6 Input Signals, Basic Display Colors and Gray Scale of Each Color	
6. Interface Timing .....	(20)
6.1 Timing Parameters (DE only mode)	
6.2 Timing Diagrams of interface Signal (DE only mode)	
7. Outline Dimension .....	(22)
8. Packing .....	(24)
9. Marking & Others .....	(25)
10. General Precaution .....	(26)
10.1 Handling	
10.2 Storage	
10.3 Operation	
10.4 Operation Condition Guide	
10.5 Others	

## General Description

### Description

**LTA460HF07** is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT (Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit.

The resolution of a 46.0" is 1920 x 1080 and this model can display up to 1.06 Billion colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide an excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV and High Definition TV.

### Features

- RoHS compliance (Pb-free)
- High contrast & aperture ratio
- SPVA (Super Patterned Vertical Align) mode
- Wide viewing angle ( $\pm 178^\circ$ )
- High speed response (120Hz)
- FHD resolution (16:9)
- Low Power consumption
- White LED Backlight
- DE (Data Enable) mode
- LVDS (Low Voltage Differential Signaling) interface

## General Information

Items	Specification	Unit	Note
Module Size	1076.5(H <sub>TYP</sub> ) x 634.7(V <sub>TYP</sub> )	mm	±1.0mm
	29.6(D <sub>TYP</sub> )		±1.0mm
Weight	12,200 (Max.)	g	
Pixel Pitch	0.530(H) x 0.530(W)	mm	
Active Display Area	1018.08(H) X 572.67(V)	mm	
Surface Treatment	Antiglare, Hard-coating(3H)	-	
Display Colors	10bit (FRC) – 1.06Billion	Colors	
Number of Pixels	1920 x 1080	Pixel	
Pixel Arrangement	RGB vertical stripe	-	
Display Mode	Normally Black	-	
Luminance of White	(450) Typ.	cd/m <sup>2</sup>	

## 1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

### 1.1 Back Light Unit Absolute Maximum Ratings

Item		Symbol	Min.	Max.	Unit	Note
Power Supply Voltage		$V_{DD}$	GND-0.3	13	V	(1)
Storage temperature		$T_{STG}$	-20	60	°C	(2)
Glass surface temperature (Operation)	Center	$T_{OPR}$	0	50	°C	(2)
Shock ( non - operating )		$S_{nop}$	-	30	G	(3)
Vibration ( non - operating )		$V_{nop}$	-	1.5	G	(4)

### 1.2 LED Unit Absolute Maximum Ratings

Item	Symbol	Max.	Unit	Note
Operating Temperature Range	$T_{op}$	-20~+70	°C	-
Storage Temperature Range	$T_{STG}$	-30~+70	°C	-
Junction Temperature	$T_j$	110	°C	-
Forward Current	$I_f$	0.09	A	Continuous operation @String (2string /1Bar)
	$I_{fp}$	0.14	A	Duty 35% operation @String (2string /1Bar)
Forward Voltage	$V_f$	187.4	V	Continuous operation @String (27 LEDs / 1String)
	$V_{fp}$	191.7	V	Impulsive operation @String (27 LEDs / 1String)
Thermal Resistance, Junction to PCB	$R_{th,JS}$	<65K/W	K/W	-

Note (1)  $T_a = 25 \pm 2^\circ\text{C}$

(2) Temperature and relative humidity range are shown in the figure below.

a. 90 % RH Max. ( $T_a \leq 39^\circ\text{C}$ )

b. Relative Humidity is 90% or less. ( $T_a > 39^\circ\text{C}$ )

c. No condensation

(3) 11ms, sine wave, one time for  $\pm X$ ,  $\pm Y$ ,  $\pm Z$  axis

(4) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis

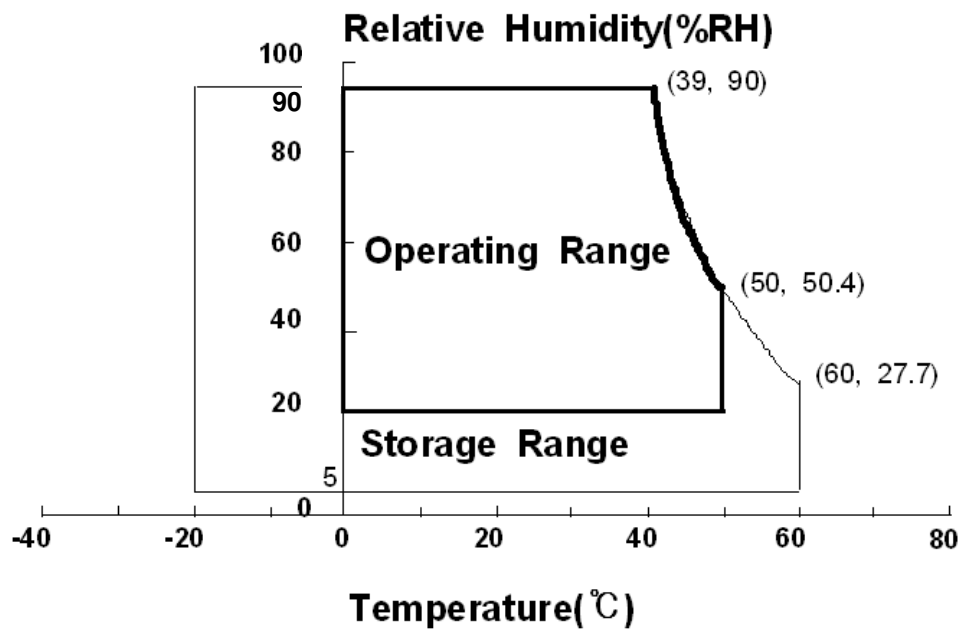


Fig. Temperature and Relative humidity range

## 2. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.

Measuring equipment : TOPCON RD-80S, TOPCON SR-3 ,ELDIM EZ-Contrast

(Ta = 25 ± 2°C, VDD=12.0V, fv=120Hz, f<sub>DCLK</sub>=297MHz, LED current =90mA)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R	Normal $\theta_{\mathbf{L,R}}=0$ $\theta_{\mathbf{U,D}}=0$  Viewing Angle	(4,000)	5,000	-	-	(1) SR-3
Response Time	G-to-G	Tg		-	6	(10)	msec	(3) RD-80S
Luminance of White (Center of screen)		Y <sub>L</sub>		(400)	450	-	cd/m <sup>2</sup>	(4) SR-3
Color Chromaticity (CIE 1931)	Red	Rx		TYP. -0.03	(0.653)	TYP. +0.03		(5),(6) SR-3
		Ry			(0.330)			
	Green	Gx			(0.288)			
		Gy			(0.640)			
	Blue	Bx			(0.150)			
		By			(0.058)			
	White	Wx			(0.280)			
		Wy			(0.290)			
Color Gamut		-		-	80	-	%	(5) SR-3
Color Temperature		-		-	10,000	-	K	
Viewing Angle	Hor.	$\theta_{\text{L}}$	C/R≥10	75	89	-	Degree	(6) EZ-Contrast
		$\theta_{\text{R}}$		75	89	-		
	Ver.	$\theta_{\text{U}}$		75	89	-		
		$\theta_{\text{D}}$		75	89	-		
Brightness Uniformity (9 Points)		B <sub>uni</sub>		-	-	25	%	(2) SR-3


### - Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the back light at the given temperature for stabilization of the back light. This should be measured in the center of screen.


- . LED current = 90mA (for 1EA LED bar)
- . Environment condition : Ta = 25 ± 2 °C

MODEL	LTA460HF07	Doc. No	06-000-G-090428	Page	6 / 28
-------	------------	---------	-----------------	------	--------

Photo detector	Field
SR-3	1°
RD-80S	2°

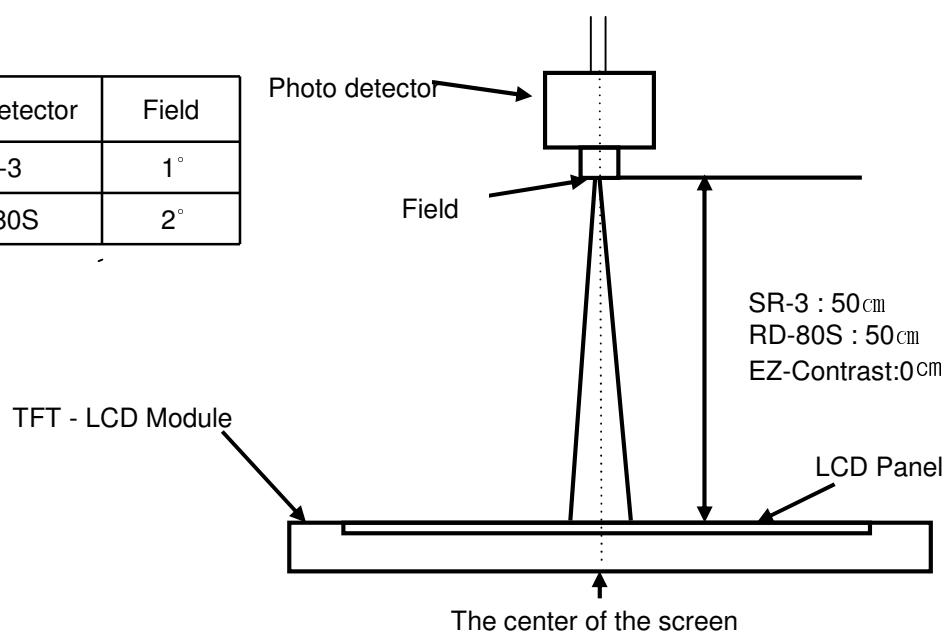

- Definition of test point

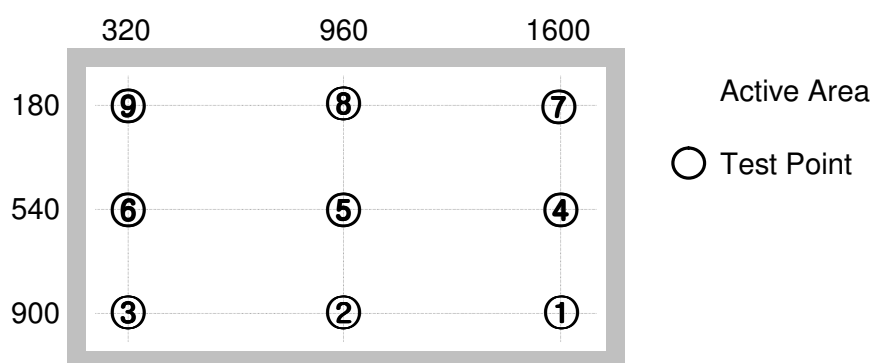

Note (1) Definition of Contrast Ratio (C/R)

: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C/R = \frac{G_{\max}}{G_{\min}}$$

Gmax : Luminance with all pixels white


Gmin : Luminance with all pixels black

Note (2) Definition of 9 points brightness uniformity (Test pattern : Full White)

$$B_{uni} = 100 * \frac{(B_{max} - B_{min})}{B_{max}}$$

Bmax : Maximum brightness  
Bmin : Minimum brightness

Note (3) Definition of Response time : Sum of Tr, Tf

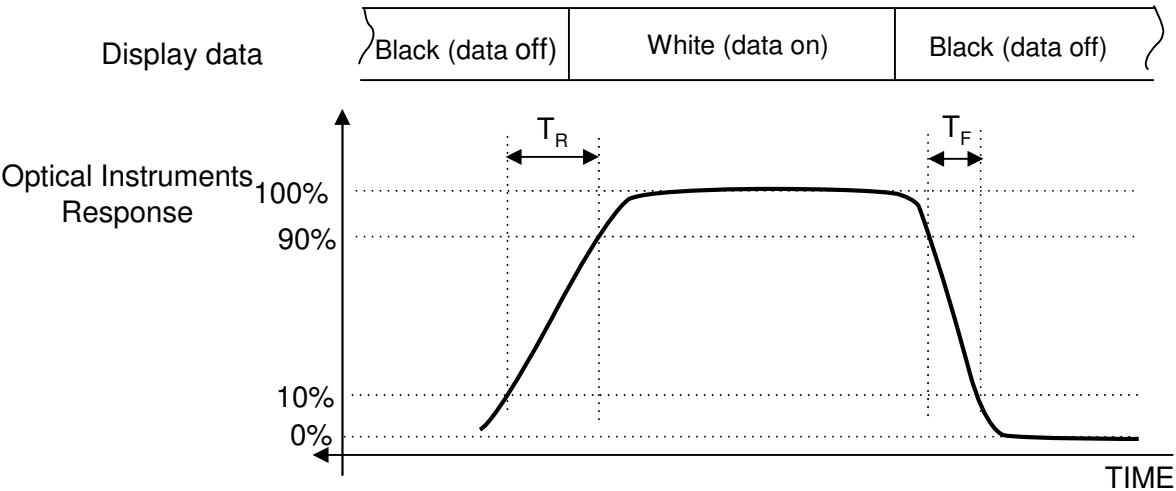


※ G-to-G : Average response time between Gray to Gray (Scale)

Note (4) Definition of Luminance of White : Luminance of white at center point ⑤

Note (5) Definition of Color Chromaticity (CIE 1931)  
Color coordinate of Red, Green, Blue & White at center point ⑤

Note (6) Definition of Viewing Angle  
: Viewing angle range ( $C/R \geq 10$ )

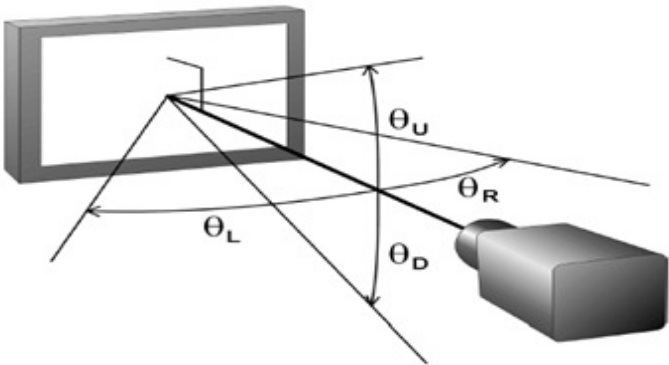



### 3. Electrical Characteristics

#### 3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$T_a = 25^{\circ}\text{C} \pm 2^{\circ}\text{C}$


Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V <sub>DD</sub>	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	I <sub>DD</sub>	-	1200	(1450)	mA	(2),(3)
	(b) White		-	1250	(1500)	mA	
	(c) H-STRIPE		-	2250	(2550)	mA	
Vsync Frequency		f <sub>V</sub>	(95)	120	(125)	Hz	
Hsync Frequency		f <sub>H</sub>	(120)	135	(140)	kHz	
Main Frequency		Fdclk	(260)	297	(310)	MHz	
Rush Current		I <sub>RUSH</sub>	-	-	(7)	A	(4)

Note (1) The ripple voltage should be controlled under 10% of  $V_{DD}$ .

(2)  $f_v=120\text{Hz}$ ,  $f_{DCLK}=297\text{MHz}$ ,  $V_{DD}=12.0\text{V}$ , DC Current.

(3) Power dissipation check pattern (LCD Module only)


a) Black Pattern




b) White Pattern



c) H-stripe

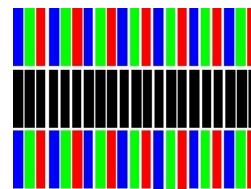

#### (4) Measurement Conditions

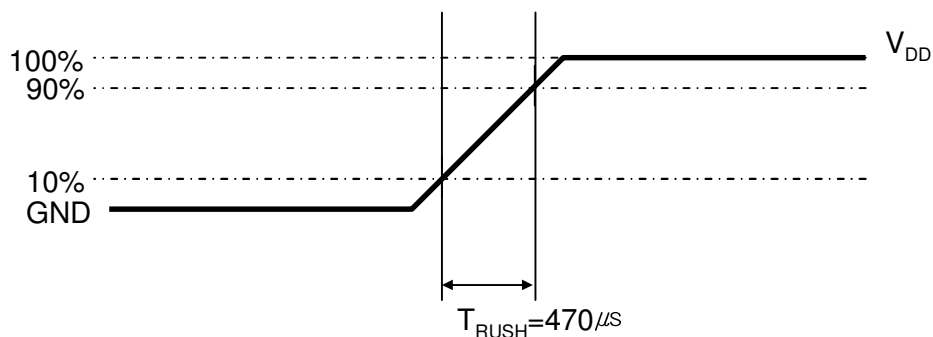


Rush Current  $I_{RUSH}$  can be measured when  $T_{RUSH}$  is  $470 \mu\text{s}$ .

3.2 Back Light Unit

The back light unit contains 324ea WLEDs (White Light Emitting Diode)

$T_a=25 \pm 2^{\circ}\text{C}$

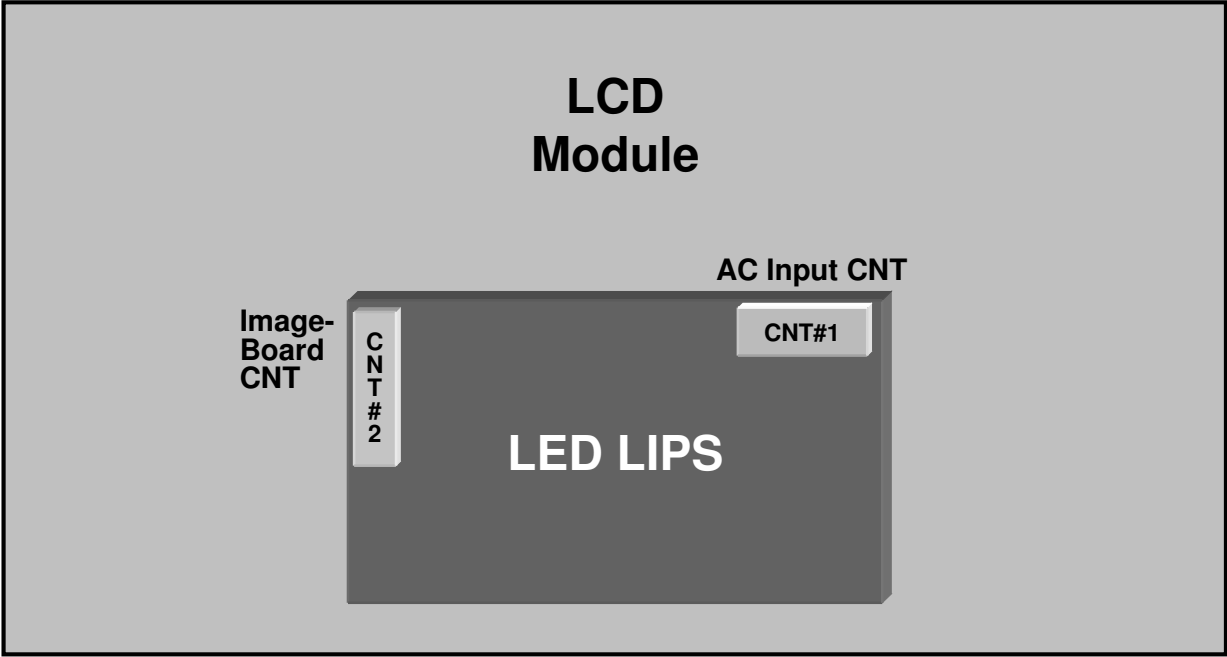

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	30,000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition :  $T_a = 25 \pm 2^{\circ}\text{C}$ ]

### 3.3 LED LIPS Condition & Specification

Items (1)		Symbol	Conditions	Specifications			Unit	Note
				Min.	Typ.	Max.		
Input	Voltage	V <sub>in</sub>	-	90	-	264	Vac	Ta=25±2 °C
	Current	I <sub>in</sub>	V <sub>in</sub> =90V	-	-	4.5	Arms	
Output	+12V	-	V <sub>in</sub> =100~240Vac	11.4	12.0	12.6	V	Ta=25±2 °C
	Current	I <sub>out</sub>	Int_Dim=3.3V	(85.5)	90	(94.5)	mArms	(2)
			Int_Dim=0V	15	20	25	%	(3)
	STB5.3V	-	V <sub>in</sub> =100~240Vac	5.0	5.3	5.5	V	Ta=25±2 °C
Dim Frequency		F <sub>PWM</sub>	V <sub>in</sub> =90~264V	140	150	160	Hz	-
PS On/Off		ON	Floating	-	-	-	V	-
		OFF	Low(GND)	0	-	0.3		
BL On/Off		ON	Floating	-	-	-	V	-
		OFF	Low(GND)	0	-	0.8		
Dimming Control		Int_Dim	Max Lum	3.3	-	-	V	-
			Min. Lum	-	-	0		

Note (1) All data is measured after 120min warm-up.


Note (2) Test Equipment

-AC current Probe : P6022 (Tektronix)

-Oscilloscope : TDS5054 (Bandwidth 20MHz)

Note (3) PWM Duty(%) = (T<sub>on</sub> / T<sub>total</sub>) \* 100

4. Block Diagram

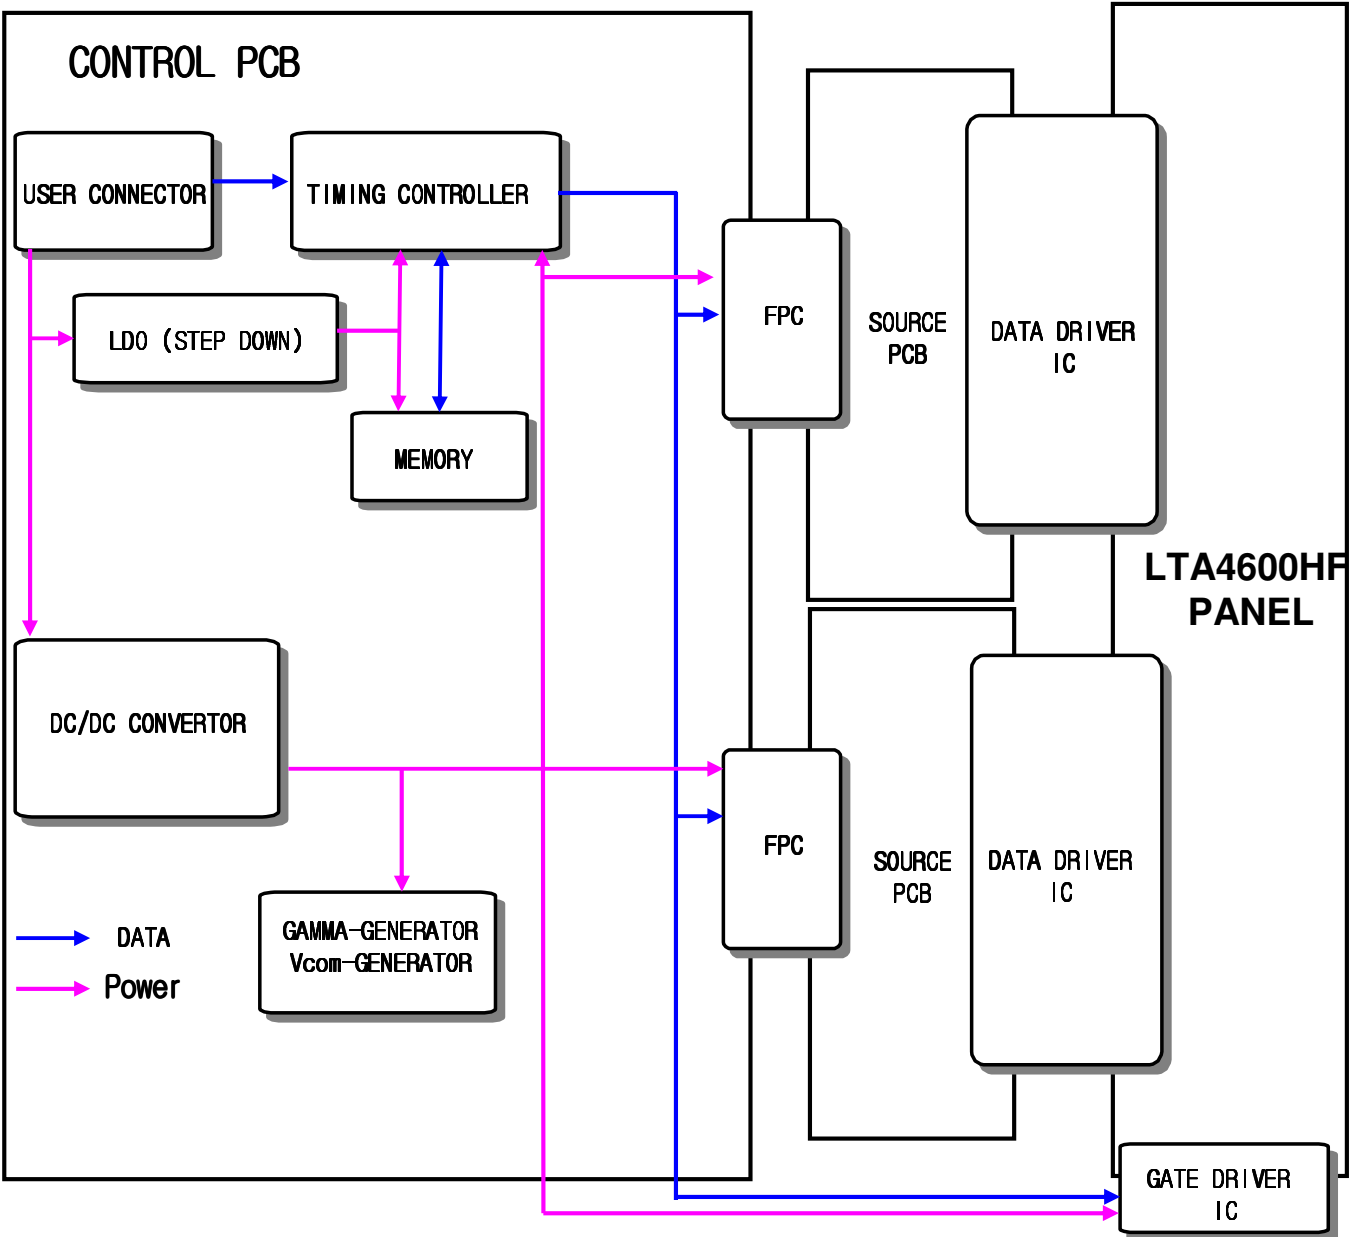

## 5. Input Terminal Pin Assignment

### 5.1. Input Signal & Power

Connector : FI-RE41S-HF (JAE)

Pin	Symbol	Description	Pin	Symbol	Description
1	12V	DC power supply	26	Rx3[0]P	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Signal +
2	12V	DC power supply	27	Rx3[1]N	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Signal -
3	12V	DC power supply	28	Rx3[1]P	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Signal +
4	12V	DC power supply	29	Rx3[2]N	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Signal -
5	12V	DC power supply	30	Rx3[2]P	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Signal +
6	<b>NC</b>	<b>NOTE</b>	31	GND	Ground
7	GND	Ground	32	Rx3CLK-	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Clock -
8	GND	Ground	33	Rx3CLK+	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Clock +
9	GND	Ground	34	GND	Ground
10	Rx1[0]N	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Signal -	35	Rx3[3]N	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Signal -
11	Rx1[0]P	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Signal +	36	Rx3[3]P	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Signal +
12	Rx1[1]N	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Signal -	37	Rx3[4]N	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Signal -
13	Rx1[1]P	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Signal +	38	Rx3[4]P	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Signal +
14	Rx1[2]N	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Signal -	39	GND	Ground
15	Rx1[2]P	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Signal +	40	<b>NC</b>	<b>NOTE</b>
16	GND	Ground	41	<b>NC</b>	
17	Rx1CLK-	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Clock -			
18	Rx1CLK+	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Clock +			
19	GND	Ground			
20	Rx1[3]N	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Signal -			
21	Rx1[3]P	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Signal +			
22	Rx1[4]N	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Signal -			
23	Rx1[4]P	1 <sup>st</sup> , 5 <sup>th</sup> LVDS Signal +			
24	GND	Ground			
25	Rx3[0]N	3 <sup>rd</sup> , 7 <sup>th</sup> LVDS Signal -			

### NOTE

**NC( No Connection) : These PINS are used only for SAMSUNG . (DO NOT CONNECT)**

MODEL

LTA460HF07

Doc. No

06-000-G-090428

Page

13 / 28

## 5. Input Terminal Pin Assignment

### 5.1. Input Signal & Power

Connector : FI-RE51S-HF (JAE)

Pin	Symbol	Description	Pin	Symbol	Description
1	12V	DC power supply	26	Rx4[0]P	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Signal +
2	12V	DC power supply	27	Rx4[1]N	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Signal -
3	12V	DC power supply	28	Rx4[1]P	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Signal +
4	12V	DC power supply	29	Rx4[2]N	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Signal -
5	12V	DC power supply	30	Rx4[2]P	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Signal +
6	NC	NOTE1	31	GND	Ground
7	GND	Ground	32	Rx4CLK-	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Clock -
8	GND	Ground	33	Rx4CLK+	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Clock +
9	GND	Ground	34	GND	Ground
10	Rx2[0]N	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Signal -	35	Rx4[3]N	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Signal -
11	Rx2[0]P	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Signal +	36	Rx4[3]P	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Signal +
12	Rx2[1]N	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Signal -	37	Rx4[4]N	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Signal -
13	Rx2[1]P	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Signal +	38	Rx4[4]P	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Signal +
14	Rx2[2]N	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Signal -	39	GND	Ground
15	Rx2[2]P	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Signal +	40	NC	NOTE1
16	GND	Ground	41	NC	
17	Rx2CLK-	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Clock -	42	NC	
18	Rx2CLK+	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Clock +	43	NC	
19	GND	Ground	44	NC	
20	Rx2[3]N	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Signal -	45	LVDS_SEL	NOTE2
21	Rx2[3]P	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Signal +	46	NC	NOTE1
22	Rx2[4]N	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Signal -	47	NC	
23	Rx2[4]P	2 <sup>nd</sup> , 6 <sup>th</sup> LVDS Signal +	48	NC	
24	GND	Ground	49	NC	
25	Rx4[0]N	4 <sup>th</sup> , 8 <sup>th</sup> LVDS Signal -	50	NC	
			51	NC	

**Note1) No Connection: These PINS are used only for SAMSUNG. (DO NOT CONNECT)**

Note2) LVDS OPTION : If this PIN is HIGH (3.3 V) → Normal LVDS format


LOW (GND) → JEIDA LVDS format

SEQUENCE : On =  $V_{DD}(T1) \geq \text{LVDS Option} \geq \text{Interface Signal}(T2)$

OFF =  $\text{Interface Signal}(T3) \geq \text{LVDS Option} \geq V_{DD}$

MODEL	LTA460HF07	Doc. No	06-000-G-090428	Page	14 / 28
-------	------------	---------	-----------------	------	---------

Note(1) Pin number starts from Left side

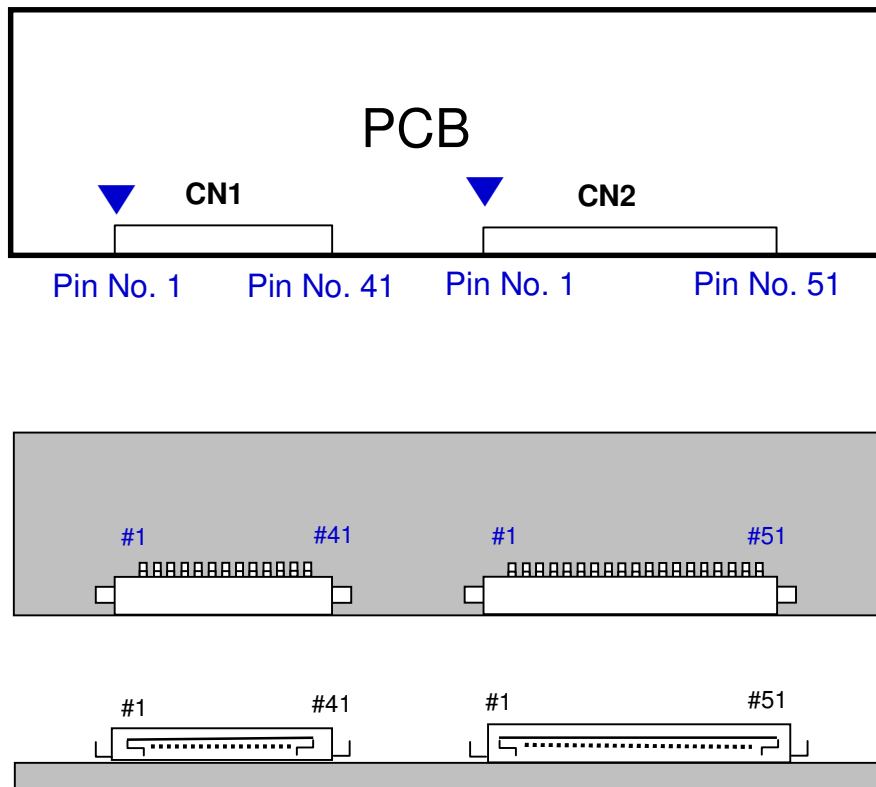

**Fig. Connector diagram**

- a. Power GND pins should be connected to the LCD's metal chassis.
- b. All power input pins should be connected together.
- c. All NC pin should be separated from other signal or power.

## 5.2 LED LIPD AC Input Pin Configuration

Connector #1 : YAW396-03AV, 2pin (YEONHO)

Pin No.	Pin Configuration (FUNCTION)
1	AC-NEUTRAL
2	AC-LIVE ( 100V ~ 240V )

## 5.3 LED LIPS Input & Output Pin Configuration


Connector #2 : SMAW200-12C, 12pin (YEONHO)

Pin No.	Pin Configuration	FUNCTION
1	+12V	OUTPUT
2	+12V	OUTPUT
3	GND	
4	+12V	OUTPUT
5	GND	
6	GND	
7	STB 5.3V	OUTPUT
8	<b>No Connection (DO NOT CONNECT)</b>	
9	GND	
10	PS_ON [ON : Floating, OFF : Low(GND)]	INPUT
11	Dimming Control [ 0V:Min, 3.3V:Max ]	INPUT
12	BL_ON [ON : Floating, OFF : Low(GND)]	INPUT



## 5.4 LED LIPS Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

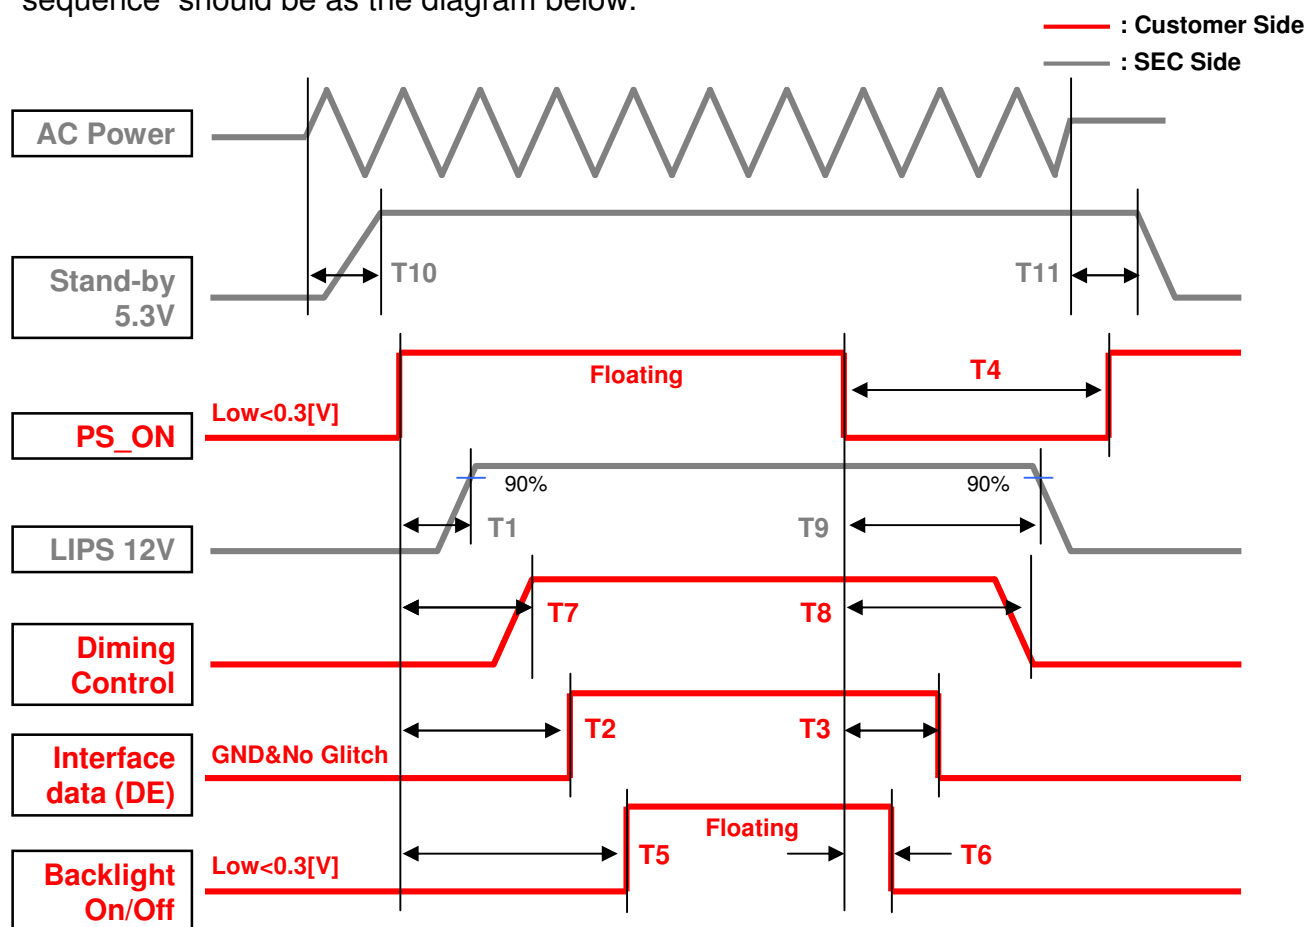

Item	Specifications [ms]	Item	Specifications [ms]
T1	$0 < T1 \leq 250$	T7	$250 \leq T7 \leq 300$
T2	$300 < T2 \leq 350$	T8	$0 < T8 \leq 20$
T3	$0 < T3 \leq 15$	T9	$55 < T9$
T4	$1500 < T4$	T10	$0 < T10 \leq 350$
T5	$1000 \leq T5$	T11	$500 < T11$
T6	$T6 = 0$		

- Apply the lamp voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
- T4 should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.

## 5.5 LVDS Interface

- LVDS Receiver : Tcon (merged)
- Data Format (JEIDA)

	LVDS pin	JEIDA -DATA	VESA-DATA
TxOUT/RxIN0	TxIN/RxOUT0	R4	R0
	TxIN/RxOUT1	R5	R1
	TxIN/RxOUT2	R6	R2
	TxIN/RxOUT3	R7	R3
	TxIN/RxOUT4	R8	R4
	TxIN/RxOUT6	R9	R5
	TxIN/RxOUT7	G4	G0
TxOUT/RxIN1	TxIN/RxOUT8	G5	G1
	TxIN/RxOUT9	G6	G2
	TxIN/RxOUT12	G7	G3
	TxIN/RxOUT13	G8	G4
	TxIN/RxOUT14	G9	G5
	TxIN/RxOUT15	B4	B0
	TxIN/RxOUT18	B5	B1
TxOUT/RxIN2	TxIN/RxOUT19	B6	B2
	TxIN/RxOUT20	B7	B3
	TxIN/RxOUT21	B8	B4
	TxIN/RxOUT22	B9	B5
	TxIN/RxOUT24	HSYNC	HSYNC
	TxIN/RxOUT25	VSYNC	VSYNC
	TxIN/RxOUT26	DEN	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R2	R6
	TxIN/RxOUT5	R3	R7
	TxIN/RxOUT10	G2	G6
	TxIN/RxOUT11	G3	G7
	TxIN/RxOUT16	B2	B6
	TxIN/RxOUT17	B3	B7
	TxIN/RxOUT23	RESERVED	RESERVED
TxOUT/RxIN4	TxIN/RxOUT28	R0	R8
	TxIN/RxOUT29	R1	R9
	TxIN/RxOUT30	G0	G8
	TxIN/RxOUT31	G1	G9
	TxIN/RxOUT32	B0	B8
	TxIN/RxOUT33	B1	B9
	TxIN/RxOUT34	RESERVED	RESERVED

## 5.6 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																										GRAY SCALE LEVEL	
		RED									GREEN									BLUE									
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7				
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-		
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-		
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-		
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-		
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-		
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-		
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-		
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-		
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0		
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1		
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~ R252		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:			
	↓ LIGHT	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R253		
		0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R254		
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R255		
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0		
	DARK ↑	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1		
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~ G252		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:			
	↓ LIGHT	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G253		
		0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G254		
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G255		
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0		
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	B1		
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	B2		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~ B252		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:			
	↓ LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	B253		
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	B254		
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	B255		

Note) Definition of Gray :

Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)

Input Signal : 0 = Low level voltage, 1 = High level voltage

## 6. Interface Timing

### 6.1 Timing Parameters ( DE only mode )

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	(260)	297	(310)	MHz	-
Hsync		$F_H$	(120)	135	(140)	KHz	-
Vsync		$F_V$	(95)	120	(125)	Hz	-
Vertical Display Term	Active Display Period	$T_{VD}$	-	1080	-	Lines	-
	Vertical Total	$T_V$	(1092)	1125	(1350)	Lines	-
Horizontal Display Term	Active Display Period	$T_{HD}$	-	1920	-	Clocks	-
	Horizontal Total	$T_H$	(2090)	2200	(2350)	clocks	-

Note) This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.

(1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system


(2) Internal  $V_{DD} = 3.3V$

(3) Spread spectrum

- Modulation rate (max) :  $\pm 1.5 \%$

- Modulation Frequency : under 100KHz

## 6.2 Timing diagrams of interface signal ( DE only mode )

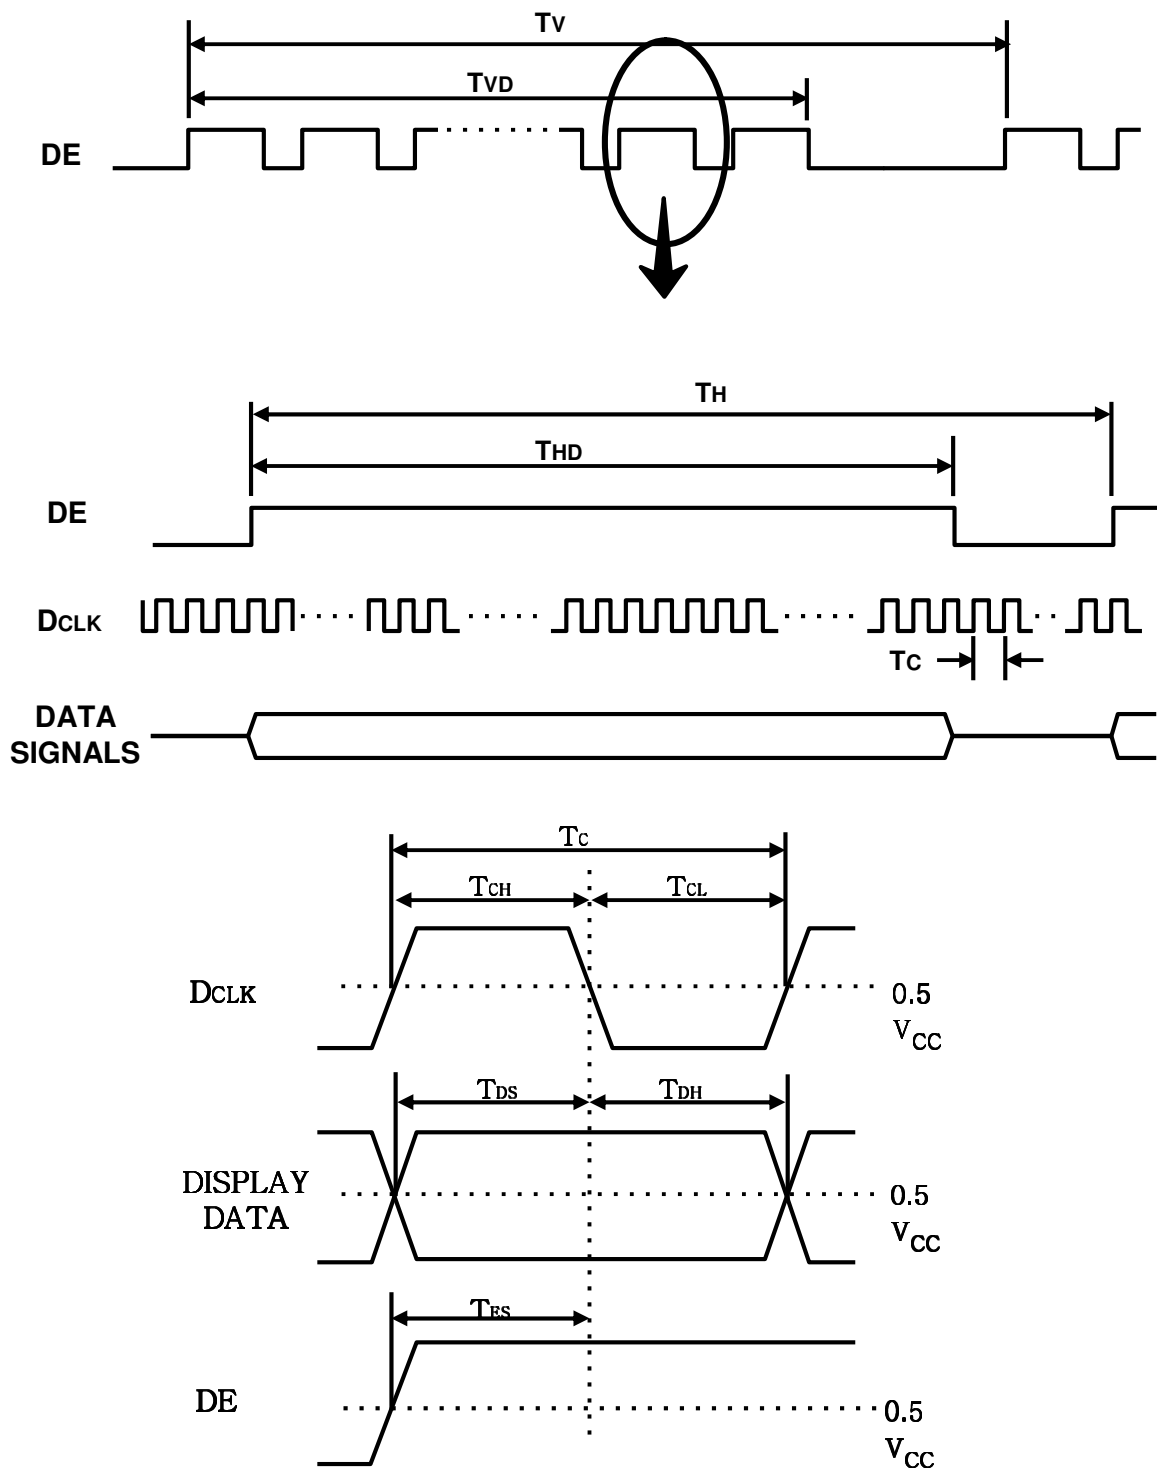

FILE NO. 1

NO.	PART NAME	CODE NO.	SPECIFICATION	Q'TY	WEIGHT	FINISH	MATERIAL	DESIGNED BY	REMARK
1	OUTLINE DIMENSION		LTA460HF07-C01	1					

1076.5<sup>#1</sup>

296<sup>#1</sup>

244<sup>#1</sup>

4-M4 (USER HOL)

4-M8 (USER HOLE)

2-120<sup>#1</sup>

2-148

170.935

161.5<sup>#1</sup>

200<sup>#1</sup>

200<sup>#1</sup>

634.7<sup>#1</sup>

319.35

200<sup>#1</sup>

200<sup>#1</sup>

8-M4 TAP

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

[illegible]

FILE NO.

NO	PART NAME	CODE NO	SPECIFICATION	Q'TY	WEIGHT FINISH	DRAWN BY MATERIAL	REMARK
1	OUTLINE DIMENSION		LTA460HF07-C01	1			

1076.5 #1

296 #1

244 #1

4-M4 (USER HOL)

4-M8 (USER HOLE)

200 #1

(170.935)

(2-148)

2-120 #1

161.5 #1

8-M4 TAP

200 #1

200 #1

634.7 #1


(319.35)

PRELIMINARY

GENERAL TOLERANCE				REV. DATE	DESCRIPTION OF REVISION		REASON		CHE'D BY
STEP	LEVEL 1	LEVEL 2	LEVEL 3	UNIT	DRAWN BY	DES'D BY	CHK'D BY	APP'D BY	MODEL NAME
0 < X ≤ 4	±0.05	±0.1	±0.2	mm					LTA460HF07-C01
4 < X ≤ 16	±0.08	±0.15	±0.3	SCALE	Y.N.KIM				
16 < X ≤ 64	±0.12	±0.25	±0.5	TOLERANCE					
64 < X ≤ 256	±0.25	±0.4	±0.8	LEVEL 2					

SAMSUNG ELECTRONICS

PART/SHEET NAME	CODE NO.	SHEET	VER.
OUTLINE DIMENSION		2/2	000

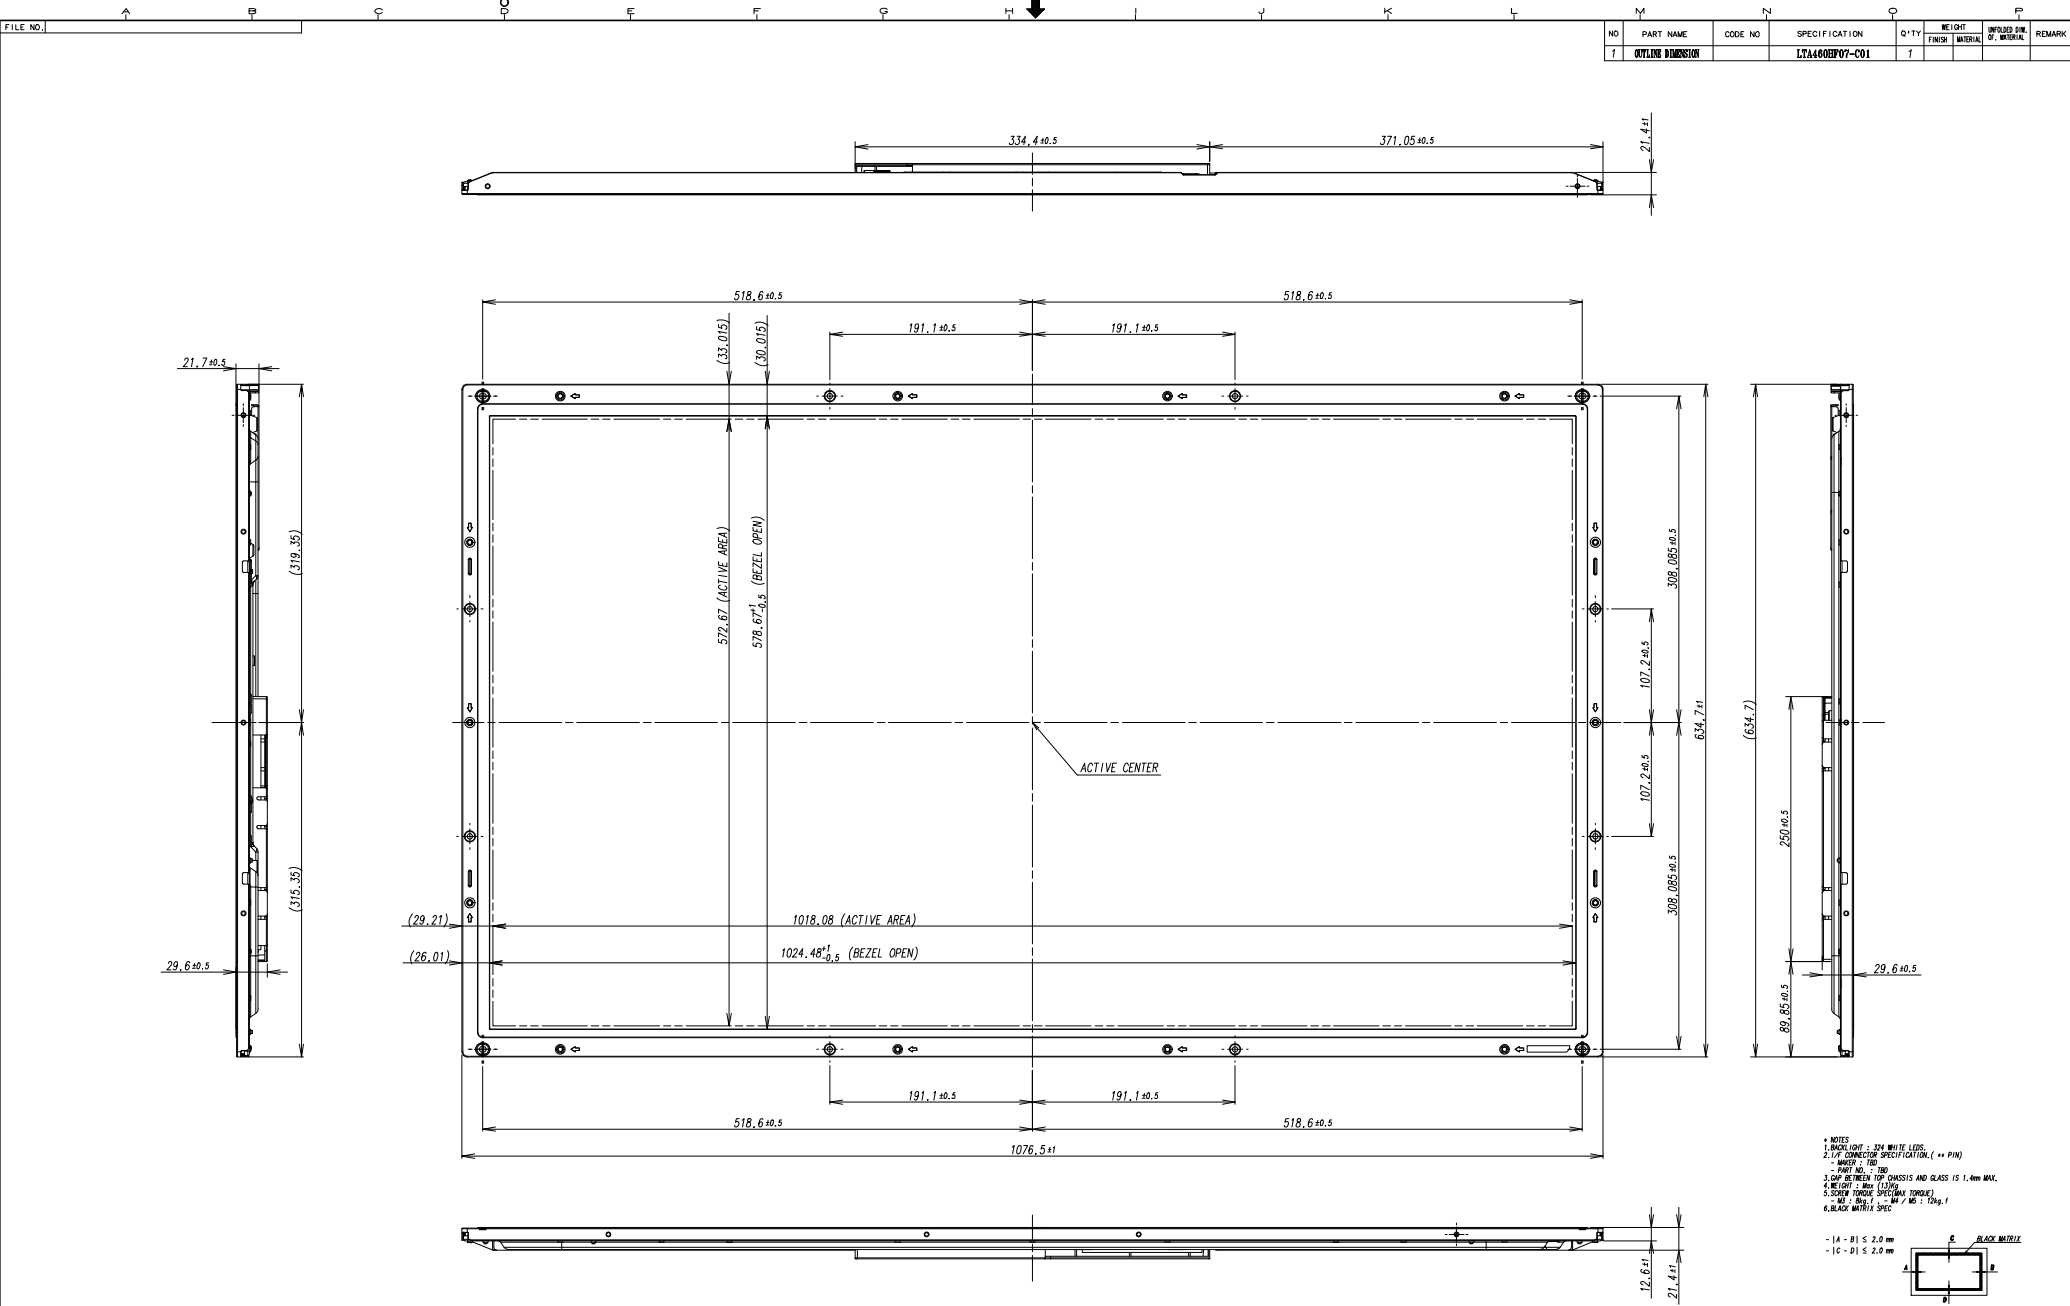

NO	PART NAME	CODE NO	SPECIFICATION	Q'TY	WEIGHT	UNIT	REMARK
1	OUTLINE DIMENSION		LTA460HF07-C01	1			

• NOTES

- BACKLIGHT : 324 WHITE LEDS
- TOP CONNECTOR SPECIFICATION ( \*\* PIN )
- WATER : T80
- PART NO. : T80
- GAP BETWEEN TOP CHASSIS AND GLASS IS 1.0mm MAX.
- BEZEL : 324 WHITE LEDS
- 324 WHITE LEDS SPEC ( \*\* PIN )
- BLACK MATRIX SPEC

- (A - B) ≤ 2.0 mm  
- (C - D) ≤ 2.0 mm

BLACK MATRIX

PRELIMINARY

GENERAL TOLERANCE				REV	DATE	DESCRIPTION OF REVISION			MODEL NAME	REASON	CHK'D BY
STEP	LEVEL 1	LEVEL 2	LEVEL 3	UNIT	mm	DRAWN BY	DES'D BY	CHK'D BY	APP'D BY	PART/SHEET NAME	
0 < X ≤ 4	±0.05	±0.1	±0.2	SCALE	1/2	Y.N.KIM	Y.H.LEE	J.H.CHEN		LTA460HF07-C01	
4 < X ≤ 16	±0.08	±0.15	±0.3	TOLERANCE							
16 < X ≤ 64	±0.12	±0.25	±0.5	LEVEL 2							
64 < X ≤ 256	±0.25	±0.4	±0.8	SPEC. NO.							

SAMSUNG ELECTRONICS

CODE NO.

VER. 000


## 8. PACKING

### 8.1 CARTON (Internal Package)

#### (1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

#### (2) Packing Method

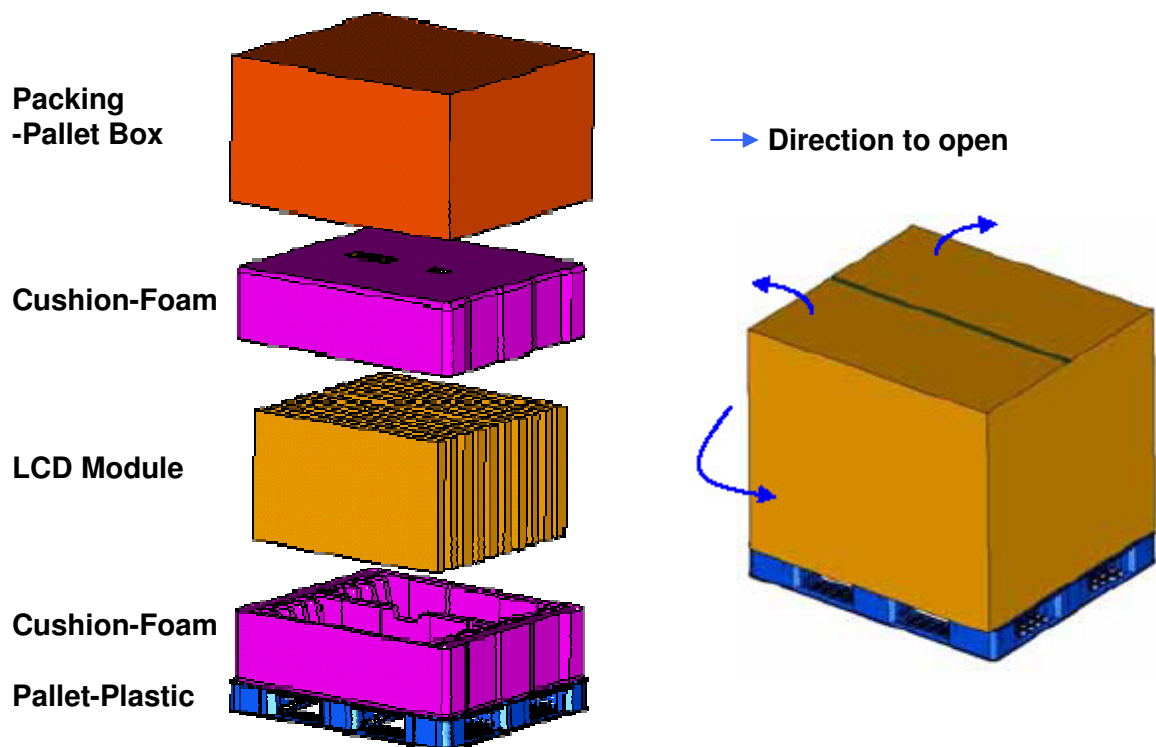

### 8.2 Packing Specification

Item	Specification	Remark
LCD Packing	16ea / (Packing-Pallet Box)	1. 195.2 Kg / LCD (16ea) 2. 12 Kg / Cushion-pallet (2ea) 3. 8 Kg / Packing-Pallet Box (1ea) 4. Cushion-pallet Material : EPS 5. Packing-Pallet Box Material : DW4
Pallet	1Box / Pallet	1. Pallet weight = 8.8 kg
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1270mm(H) x 1150mm(V) x 844mm(height)
Total Pallet Weight	224 kg	Pallet(8.8kg) + Module(195kg) + Cushion(up+bottom=12kg) + Pallet-BOX(8kg)




## 9. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


(1) Part number : LTA460HF07

(2) Revision: Three letters


(3) Lot number : X X X X XXX XX X

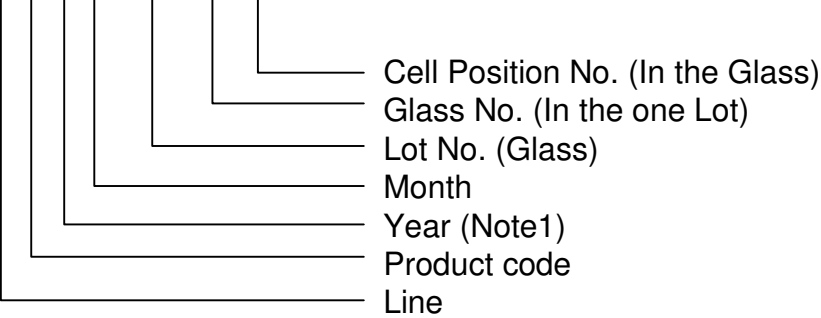

(4) Nameplate Indication

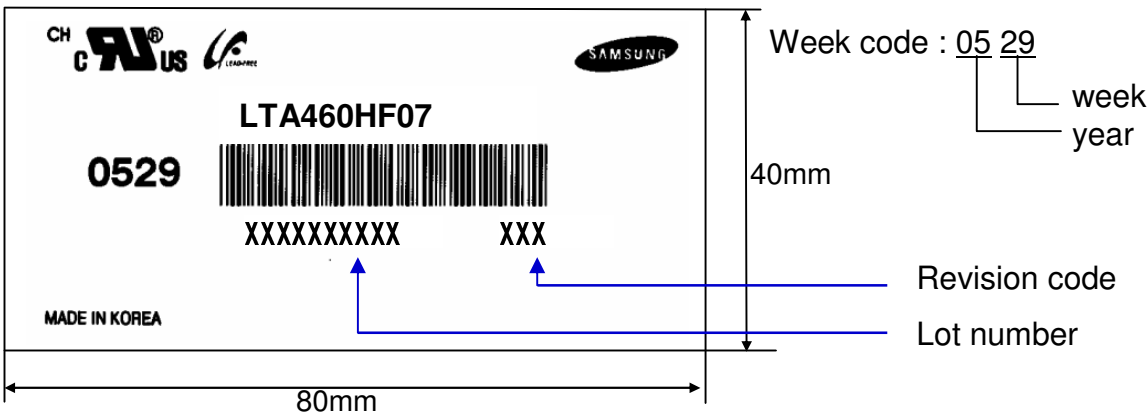

(5) Packing box attach

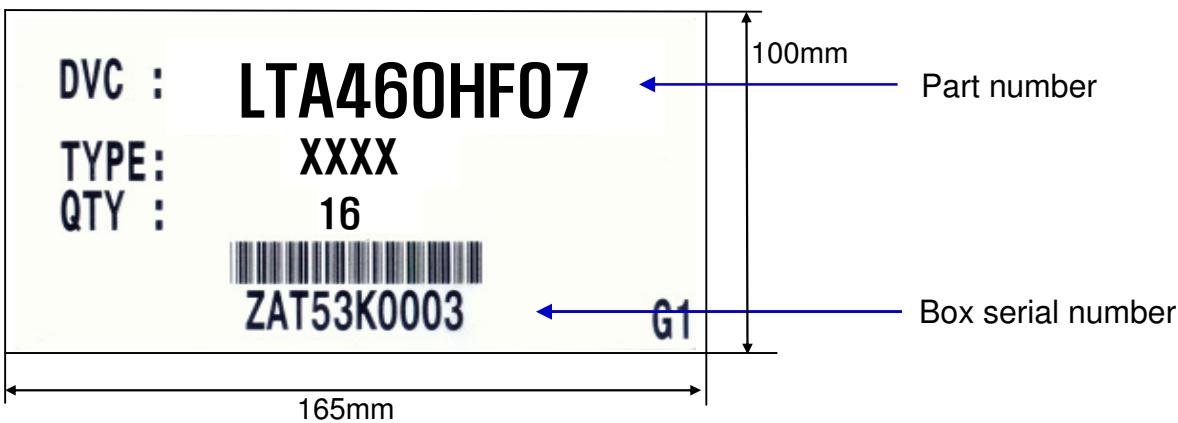

MODEL	LTA460HF07	Doc. No	06-000-G-090428	Page	25 / 28
-------	------------	---------	-----------------	------	---------

## 10. General Precautions

### 10.1 Handling

- (a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.
- (b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.
- (c) Refrain from strong mechanical shock and / or any force to the Module.  
In addition to damage, this may cause improper operation or damage to the Module and LED back light.
- (d) Note that polarizers are very fragile and could be damage easily.  
Do not press or scratch the surface harder than a HB pencil lead.
- (e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.
- (f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.
- (g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane.  
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.
- (i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or Semiconductor would be damaged.
- (j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (k) Do not disassemble the Module.
- (l) Do not disassemble shield case of inverter & LVDS board.
- (m) Do not connect N.C pins. (Samsung internal use only)
- (n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handle a module
- (o) Pins of I/F connector should not be touched directly with bare hands.

MODEL	LTA460HF07	Doc. No	06-000-G-090428	Page	26 / 28
-------	------------	---------	-----------------	------	---------

## 10.2 Storage

- (a) Do not leave the Module in high temperature, and high humidity for a long time. It is highly recommended to store the Module with temperature from 0 to 35 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD Module in direct sunlight.
- (c) The Module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storing.

## 10.3 Operation

- (a) Do not connect or disconnect the Module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the "Power on/off sequence"
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the back light connector and its inverter power supply should be connected directly with a minimized length. A longer cable between the back light and the inverter may cause lower luminance of LED and may require higher startup voltage(Vs).

## 10.4 Operation Condition Guide

- (a) The LCD product should be operated under normal conditions.  
Normal condition is defined as below;
  - Temperature :  $20 \pm 15$  °C
  - Humidity :  $55 \pm 20$  %
  - Display pattern : continually changing pattern (Not stationary)
- (b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

MODEL	LTA460HF07	Doc. No	06-000-G-090428	Page	27 / 28
-------	------------	---------	-----------------	------	---------

## 10.5 Others

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. ( supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)  
Otherwise the Module may be damaged.
- (d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked " to the screen.  
To avoid image sticking, it is recommended to use a screen saver.
- (e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.
- (f) Please contact SEC in advance when you display the same pattern for a long time.

MODEL	LTA460HF07	Doc. No	06-000-G-090428	Page	28 / 28
-------	------------	---------	-----------------	------	---------